

MANURE SPREADER DISTRIBUTION MACHINES **KG15**

KG15



About Product

KG15 cubic meter solid fertilizer spreader is manufactured using high-strength steel. This provides exceptional rigidity with a low weight. The high performance monoblock triple body gearbox specially produced by İZELMAK provides the beaters with an extremely high rotational speed and ensures perfect shredding of the material.

Optional Features

- ▶ Auger Distributor
- ▶ Top Addition. Hot Dip Galvanized Coating
- ▶ Wheel 650 X 75 X R32

CAPACITY	MINIMUM POWER	AUGER SPEED	NUMBER OF BLADES
15m³	90hp	391,3 Rpm	48

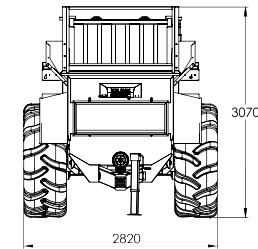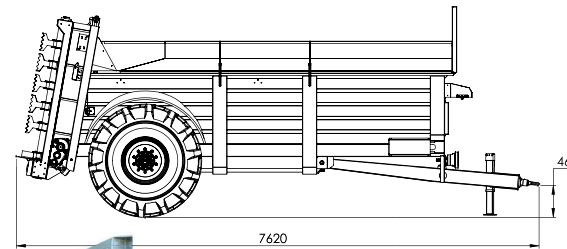

STANDARD FEATURES	
CAPACITY	15m ³
MIN. POWER REQUIREMENT	90 HP
AUGER SYSTEM	2 Ad
AUGER SPEED	391,3 Rpm
NUMBER OF BLADES	48 Ad
WHEEL SIZE	23 - 1 - 26
NUMBER OF AXLES	Tek
SPREADING WIDTH	20 M
PTO DEVRI	540 Rpm
EXCHANGE RATIOS	1,38

STANDARD FEATURES	
LENGHT	7620 mm
HEIGHT	3070 mm
WIDHT	2820 mm
BODY SHEET	4 mm
BASE PLATE	6 mm
EMPTY WEIGHT	4500 kg
FULL WEIGHT	21500 kg

Depending on added options, the specified features can be change.

